

Printer Software Instalation for Windows

To use this service you need a @deec.uc.pt or @uc.pt account!


Introduction

In this document, the installation of the printers in the locker room and cabinet 3A4 on Windows will be presented step by step.

Installing the printer


- 1** - To install the printers it is necessary to download the drivers [here](#).
- 2**- Run the client-local-install.exe installer located in the “drivers \ client \ win” folder in the ZIP file.

Image not found or type unknown

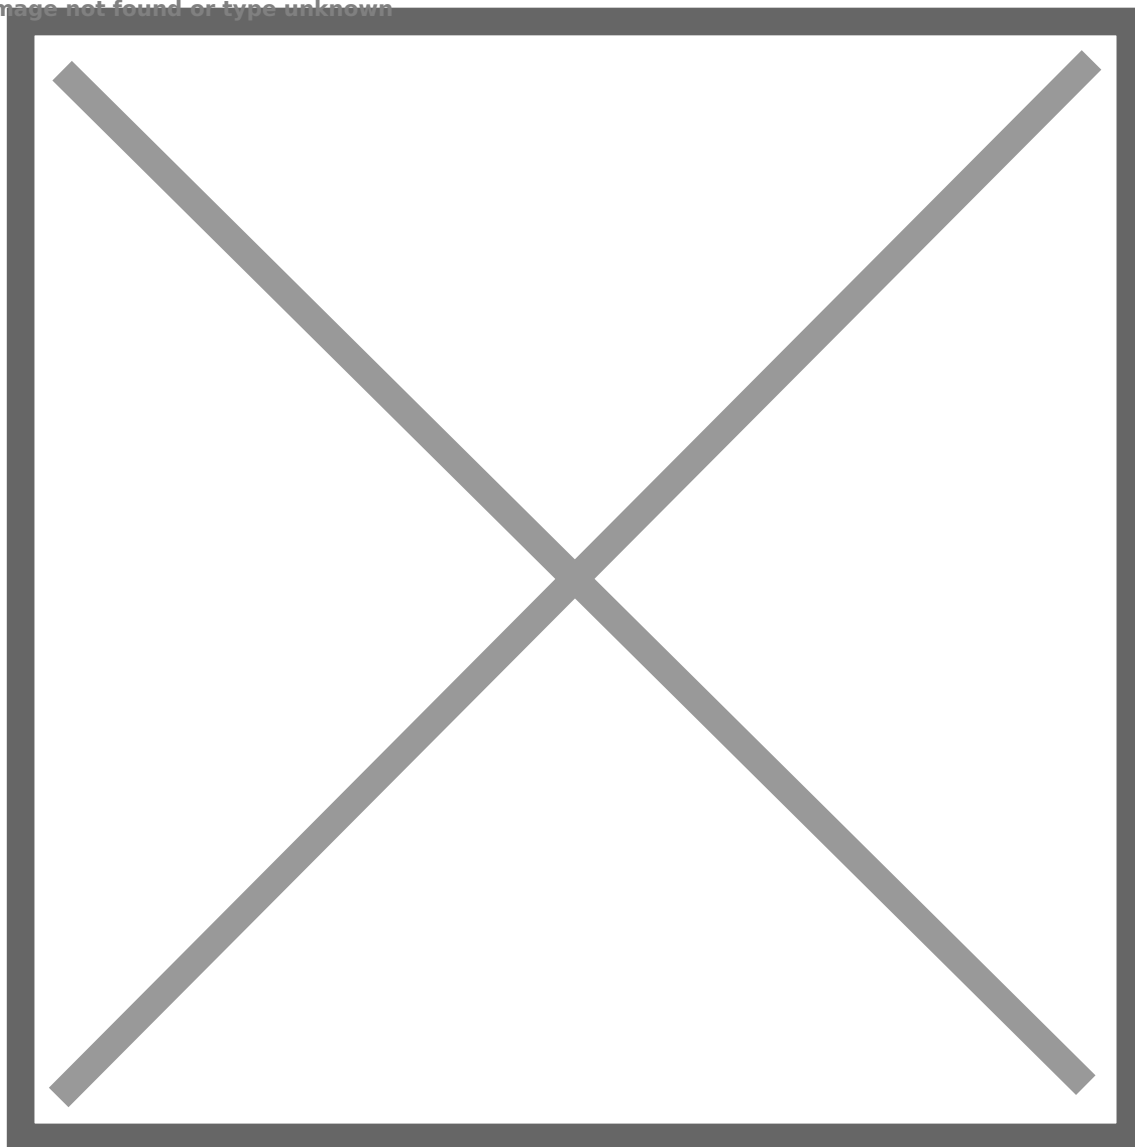

3- Enter your DEEC credentials.


Image not found or type unknown

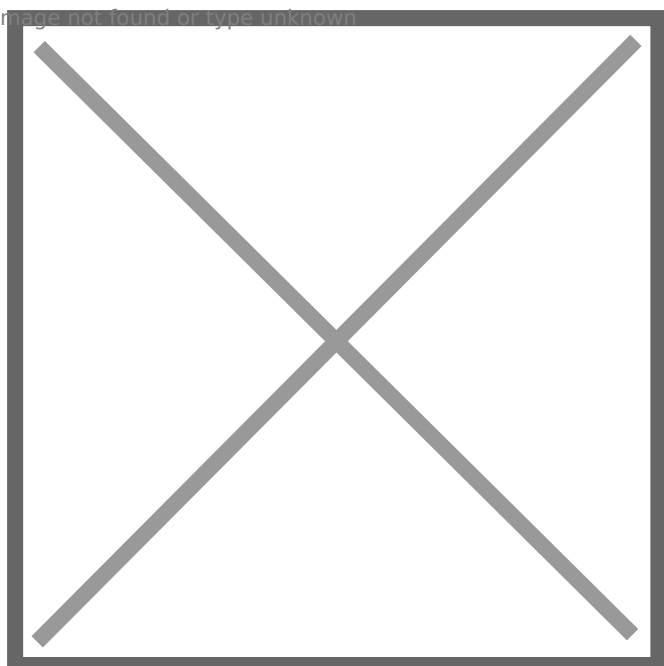

4- Subsequently, access the Control Panel, option “View devices and printers” and select the option “Add new printer”.

5- In the window that will open (Add a device), click on “The printer I want is not listed”.


Image not found or type unknown

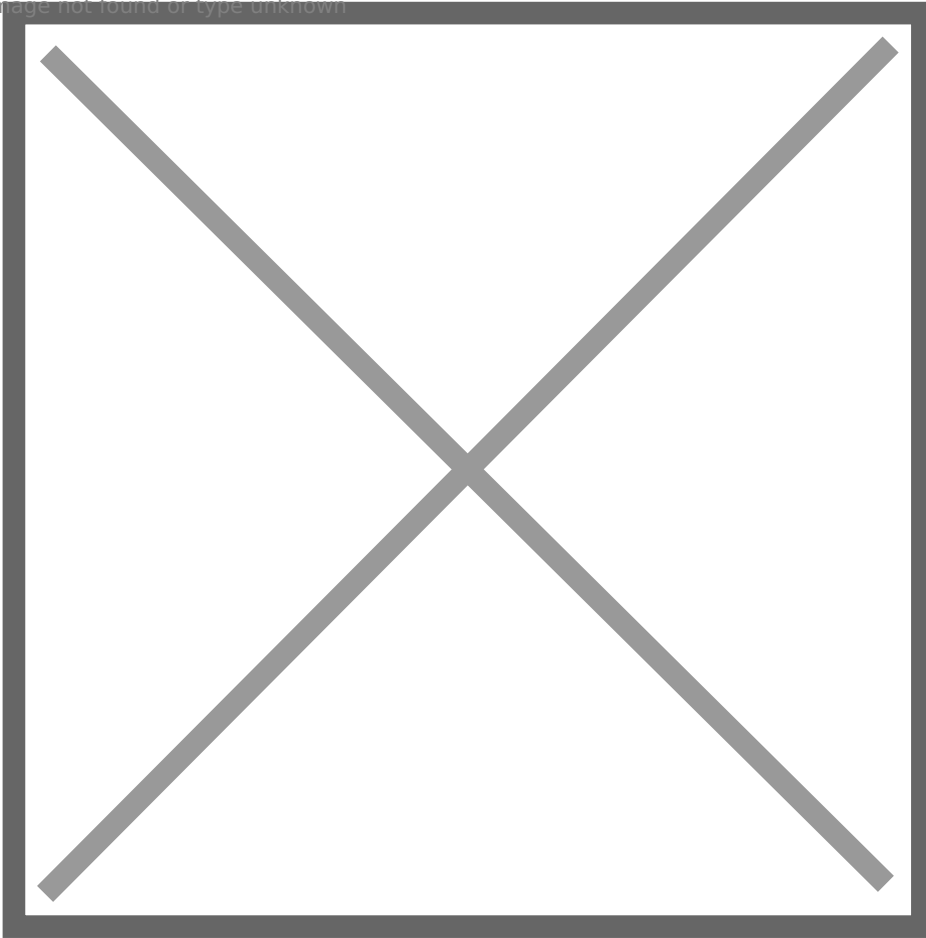

6- Then select the option "Select a printer shared by name" and enter the address of the printer you want to install:


- Color printer in the locker room: <http://print.deec.uc.pt:631/printers/CacifosColor>
- Black and white printer from the locker room:
<http://print.deec.uc.pt:631/printers/CacifosGrayscale>
- Color printer in 3A4: <http://print.deec.uc.pt:631/printers/gab-3a4>

Image not found or type unknown

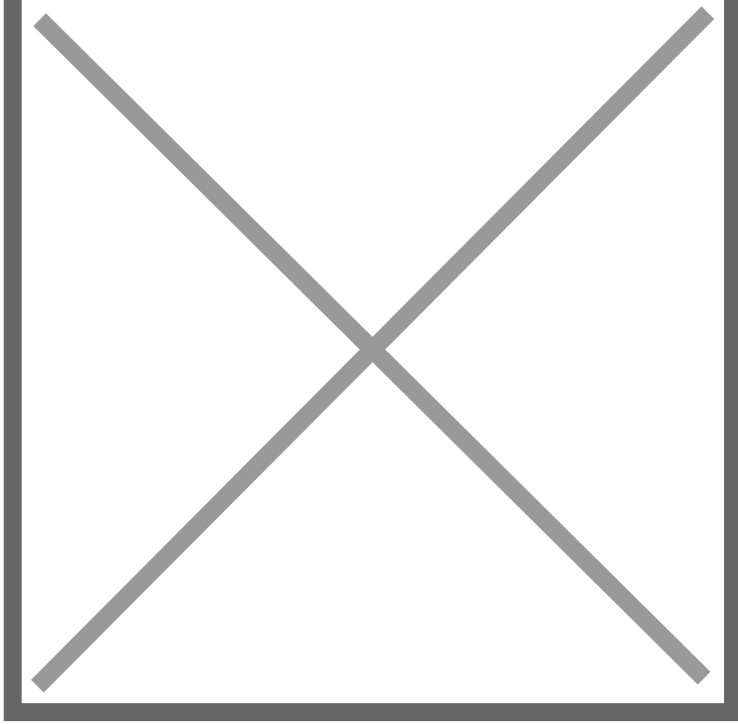

7- Then click on the “Disk” button and choose the driver that you downloaded in the first step of this manual.

Image not found or type unknown

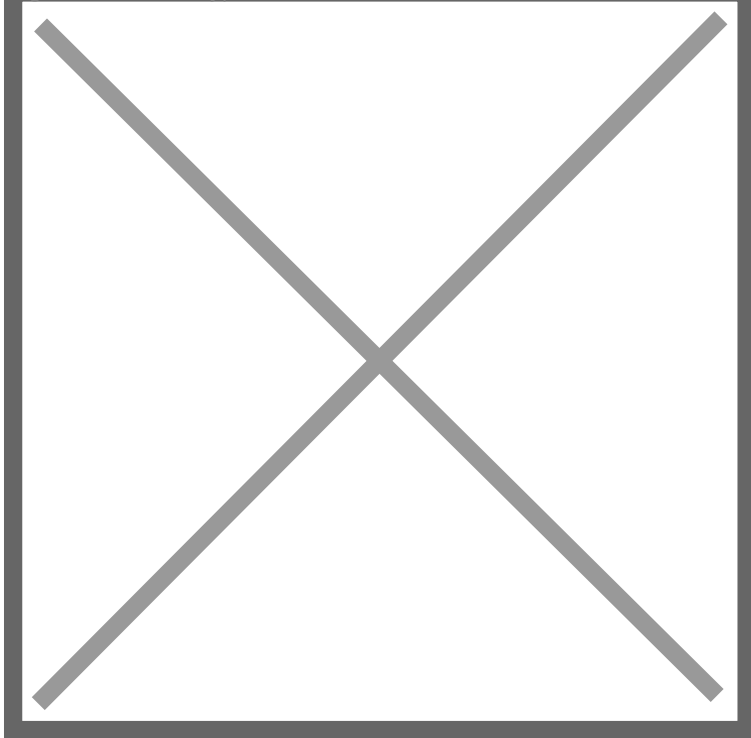

8- Select the driver in the “drivers \ drivers \ win \ PC-Global-Print-Driver” folder and click on next.

Image not found or type unknown


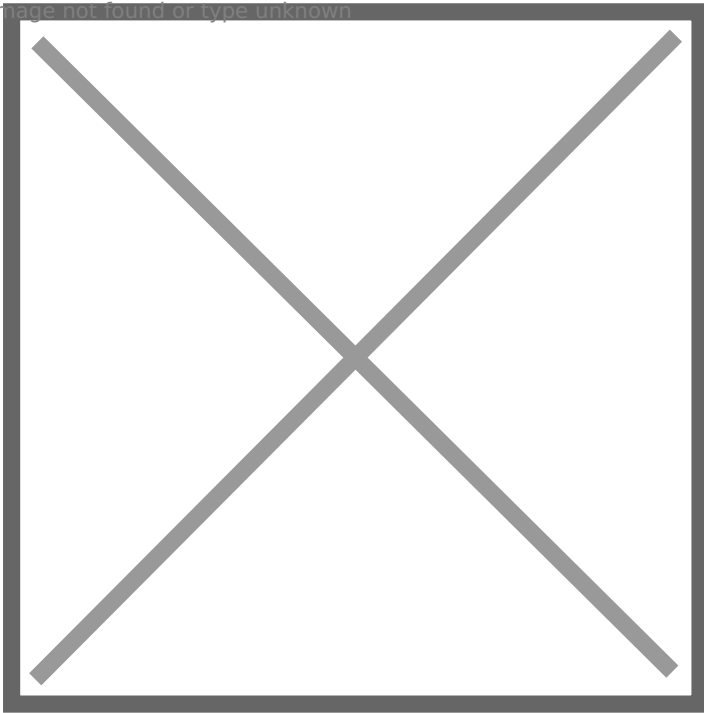


Image not found or type unknown

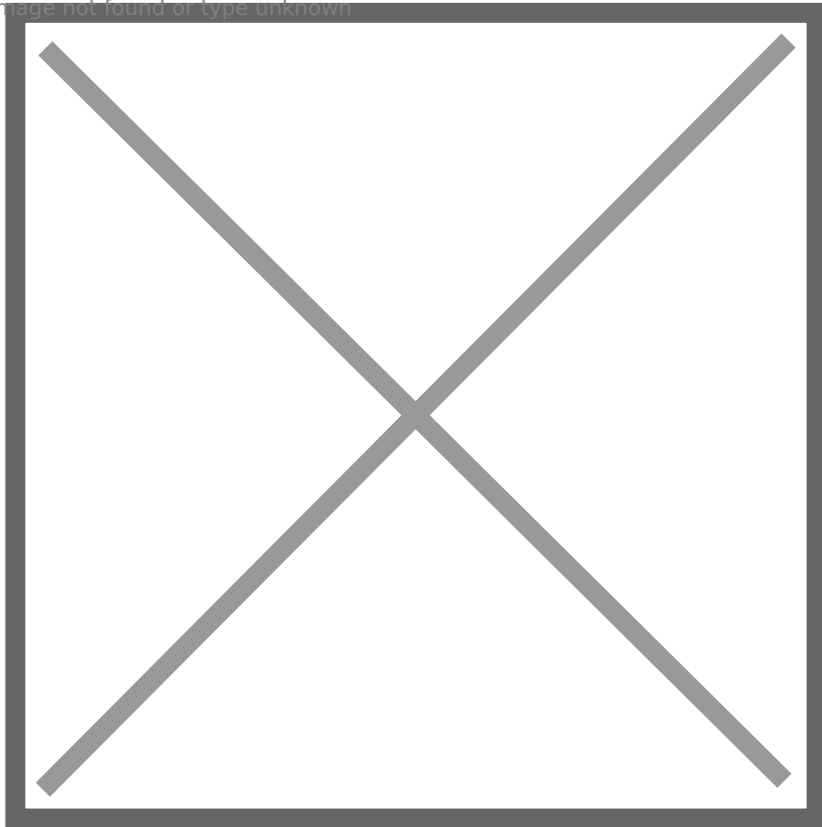


The printer is now successfully installed.

Default duplex printing


To perform default duplex printing, the following steps are required:

1 - Access the control panel.

2 - With the right mouse button on the desired printer, select the option "Printing preferences".

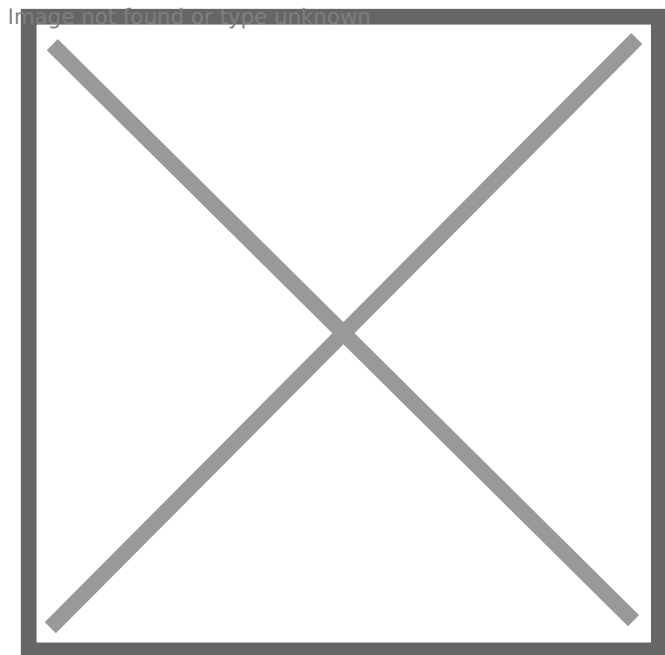

3 - In the "Printing Preferences" window, select the "Layout" tab and in the "Print on both sides" dropdown, use the option "Flip to the widest edge" or "Flip to the narrowest edge".

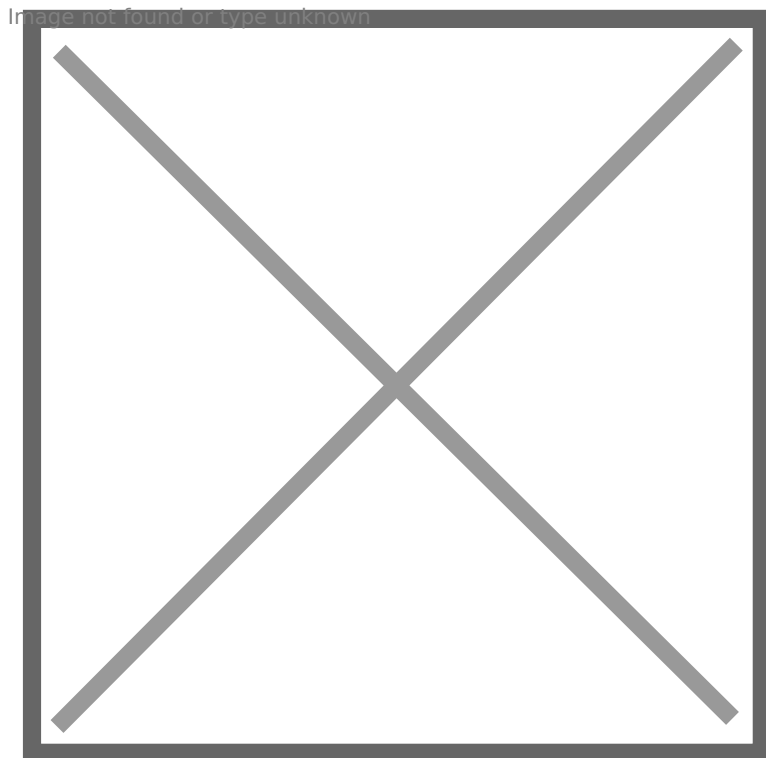

In this way, the prints you make will default to these settings.

